


# Smartfob Battery

## REPLACEMENT GUIDE

- 1 Unscrew the Smartfob case




- 2 Gently slip a screwdriver under the board and lift it out of the case.

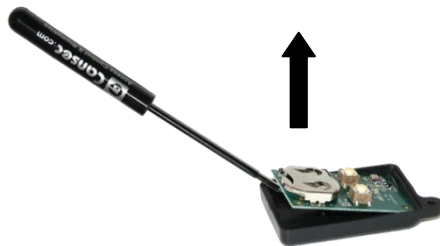


**IMPORTANT:** Do not pull on any of the board components or use the battery clip to lift the board.

- 3 Use the screwdriver to slide the battery out of the clip.

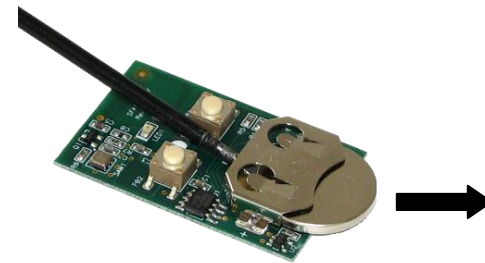

- 4 Line up the plus sign (+) on the clip with the plus sign on the new battery and slide it into place.

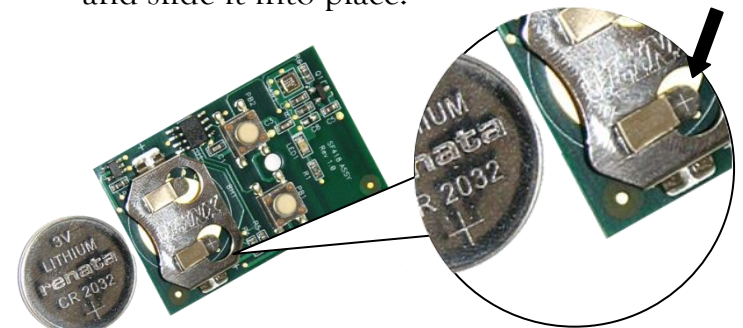

This guide is available at: [www.cansec.com](http://www.cansec.com)