


EXPRESS / ADVANCED SOFTWARE FOR APERIO WIRELESS LOCKS

NEW – Supports FA MSM App

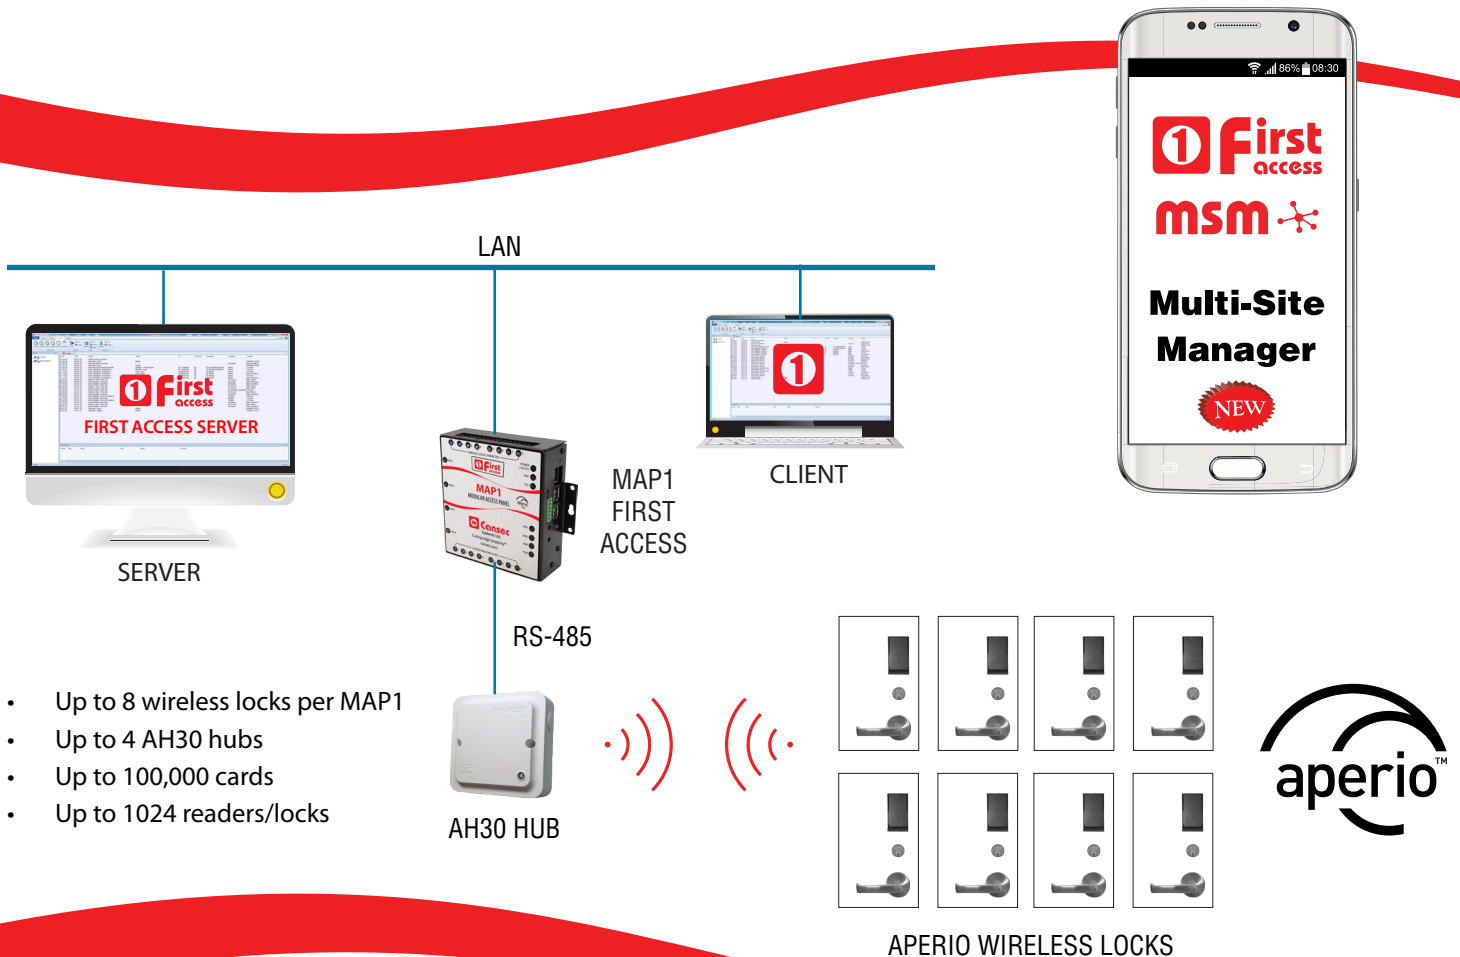


Cansec's First Access® software provides a powerful yet easy to use platform to manage the whole family of MAP access control panels. It is available in two versions: The free Express version for basic access control functions and Advanced for more complex applications. Both support up to 1,024 readers and 100,000 cards. **NEW** - First Access Advanced software now support the First Access Admin app which allows you to control and manage your system from anywhere.

To facilitate deployment, First Access software automatically scans the local network and finds all connected MAP controllers. No need to assign each panel a static IP address. Using the First Access Client software, operators can quickly and easily void and validate credentials, edit Unlock Schedules, Holiday Schedules, Access Profiles, etc.

FEATURES & COMPARISON

FIRST ACCESS	ADVANCED
Cardholder/user capacity	100,000
Reader capacity	Up to 1024
First Access clients	10 (5 for Express)
Automatically finds MAP controllers	Yes
Up to 5 credentials per user	Yes
Real time TCP/IP based communications	Yes
Programmable access profiles and holidays	Yes
Entry & Exit reader per door	Yes
Automatic door unlock schedules	Yes
Alarms for forced entry/door held open conditions	Yes
Double-swipe privilege per user per door	Yes
Double-swipe as trigger	Yes*
Uses Microsoft SQL database	Yes
Card + Pin	Yes
Elevator control	Yes
Email notifications/alarms	Yes
Timed anti-passback	Yes*
Photo Popup	Yes*
Door interlock	Yes*
Card groups	Yes*
Auxiliary input/output points	Yes*
Local anti-passback	Yes*
Scheduled commands & triggers	Yes*
First Card In – Card Group	Yes*
Software key required	Yes
Asure ID photo badging integration (Option)*	Yes *
* Uses 1 First Access client connection	(9 FA clients left)
NVR support for Uniview	Yes*
Partition (Option)	Yes*
Enhanced Attendance Reporting software (Option)	Yes*
NEW - Supports the FA MSM App	Yes*

DIAGNOSTIC LEDS

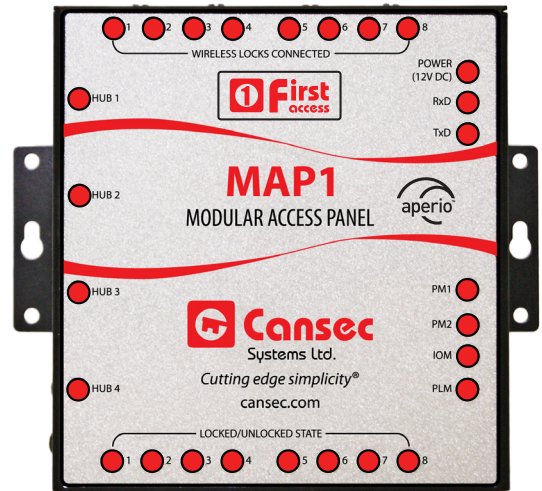

To simplify installation, support and maintenance, the MAP1 contains twenty seven status LEDs which show, for example, AH30 hubs connected, locks connected, lock/unlocked state of each lock, power and several others.

Supports all Aperio wireless locks: 

ES100 Series IN100 K100 KS100 G100



PART NUMBERS

- CA-MAP12AF (2-Door Configuration)
- CA-MAP14AF (4-Door Configuration)
- CA-MAP16AF (6-Door Configuration)
- CA-MAP18AF (8-Door Configuration)
- CA-MAP12U4AF (2-Door Upgrade to 4-Door)
- CA-MAP14U6AF (4-Door Upgrade to 6-Door)
- CA-MAP16U8AF (6-Door Upgrade to 8-Door)

***NOTE:** No for First Access Express software

SPECIFICATIONS

Dimensions	4.624" (L) x 4.88" (H) x 2" (D) [117 mm (L) x 124 mm (H) x 51 mm (D)]
With Mounting Flange	5.625" (L) x 4.88" (H) x 2" (D) [143 mm (L) x 124 mm (H) x 51 mm (D)]
Weight	500 g [17.6 oz]
Temperature	0°C to 60°C [32°F to 140°F]
Power	12VDC / 300mA
Warranty	5 years

